


Expert in Fans

Industrial Stand & Wall Fan, Floor Fan
Portable Ventilator, Movable Blower
Flexible Hose, Exhaust Fan, Misting Fan



INDUSTRIAL QUALITY
100%
PURE COPPER WIRE



Since 1975

Industrial Stand Fan (20" , 24" , 26" , 30")

- Large air volume and low noise, effectively motor
- Three speeds, powder, chrome densely guard
- Motor with over-heat protection and overload function for safety
- Optimized aluminum-iron blade structure, three blade
- Stand Fan with height adjustment and enough heavy and strong cross iron base for safety
- Suitable for cooling-down temperature in mineral factories, workshop, warehouse and hall etc.



Introduction to Functions

Model No	Size mm	Voltage	Phase	Frequency Hz	Power W	Speed r/min	Air Volume m ³ /min	Noise dB(A)
SASF-20C3B 20"	500	220-240	1	50/60	130	1400/1600	170	73
SASF-24C3B 24"	600	220-240	1	50/60	150	1400/1600	185	76
SASF-26C3B 26"	650	220-240	1	50/60	230	1400/1600	205	80
SASF-30C3B 30"	750	220-240	1	50/60	280	1400/1600	290	86

Introduction to Package

Model No	NW KGS	GW KGS	Packing (1PC/CTN)			
			Meas(cm)	20GP	40GP	40HQ
SASF-20C3B 20"	14.0	15.0	58×22×63	350	750	850
SASF-24C3B 24"	16.0	17.0	68×20×66	305	610	730
SASF-26C3B 26"	17.0	18.0	74×20×75	250	500	610
SASF-30C3B 30"	19.0	20.0	82×20×82	215	420	510

All the pictures are for reference only, pls adhere to the actual product as the standard, the right of final explanation is owned by our SuperAsia.

Industrial Wall Fan (20" , 24" , 26" , 30")

- Large air volume and low noise, effectively motor
- Three speeds, powder, chrome densely guard
- Motor with over-heat protection and overload function for safety
- Optimized aluminum-iron blade structure, three blade
- Suitable for cooling-down temperature in mineral factories, workshop, warehouse and hall etc.



Introduction to Functions

Model No	Size mm	Voltage	Phase	Frequency Hz	Power W	Speed r/min	Air Volume m ³ /min	Noise dB(A)
SAWF-20C3B 20"	500	220-240	1	50/60	130	1400/1600	170	73
SAWF-24C3B 24"	600	220-240	1	50/60	150	1400/1600	185	76
SAWF-26C3B 26"	650	220-240	1	50/60	230	1400/1600	205	80
SAWF-30C3B 30"	750	220-240	1	50/60	280	1400/1600	290	86

Introduction to Package

Model No	NW KGS	GW KGS	Packing (1PC/CTN)			
			Meas(cm)	20GP	40GP	40HQ
SAWF-20C3B 20"	9.0	10.0	58×20×58	420	840	1015
SAWF-24C3B 24"	10.0	11.0	67×20×67	310	620	760
SAWF-26C3B 26"	11.0	12.0	72×20×72	270	540	660
SAWF-30C3B 30"	12.0	13.0	82×20×82	210	420	510

All the pictures are for reference only, pls adhere to the actual product as the standard, the right of final explanation is owned by our SuperAsia.

Floor Fan (12" , 16" , 18" , 20")

- Legerity、durablity operation
- Stylish outlook、graceful、convenient to move
- Three speeds、adjustable angle of pitch for easy to use
- Optimized aluminum-iron blade structure, large air flow
- Suitable for home, office, hotel, store, hall and so on



Introduction to Functions

Model No	Size mm	Voltage	Phase	Frequency Hz	Power W	Speed r/min	Air Volume m ³ /min	Noise dB(A)
SAFD-12 12"	300	220-240	1	50/60	60	1400/1600	40	61
SAFD-16 16"	400	220-240	1	50/60	126	1400/1600	85	64
SAFD-18 18"	450	220-240	1	50/60	135	1400/1600	124	69
SAFD-20 20"	500	220-240	1	50/60	160	1400/1600	142	70

Introduction to Package

Model No	NW KGS	GW KGS	Packing (1PC/CTN)			
			Meas(cm)	20GP	40GP	40HQ
SAFD-12 12"	2.8	3.8	40.5×21×41	800	1600	1900
SAFD-16 16"	4.8	5.8	52.5×24×50	430	860	1050
SAFD-18 18"	5.5	6.5	59×25×56	330	660	800
SAFD-20 20"	6.0	7.3	62×26×61	280	560	670

Industrial Circomatic Fan (18" , 20")

- Streaming blade design, low noise
- Oscillating controlled by aluminum gear box
- Saving place, cooling-down temperature
- Oscillating flexibly, mild wind, durable using life
- Suitable for home, office, hotel,store, hall and so on.



Introduction to Functions

Model No	Size mm	Voltage	Phase	Frequency Hz	Power W	Speed r/min	Air Volume m ³ /min	Noise dB(A)
SAICF-18	450	220-240	1	50/60	130	1400/1600	124	70
SAICF-20	500	220-240	1	50/60	150	1400/1600	170	73

Introduction to Package

Model No	NW KGS	GW KGS	Packing (1PC/CTN)		
			20GP	40GP	40HQ
SAICF-18	6.5	7.5	600	1200	1550
SAICF-20	7.0	8.0	550	1100	1400

All the pictures are for reference only, pls adhere to the actual product as the standard, the right of final explanation is owned by our SuperAsia.

Industrial Stand Fan (18")

- Low noise, effectively motor
- Three speeds, with over-heat protection
- Adjustable angle of pitch for easy use
- Optimized aluminum-iron ABS or Aluminum blade structure, four blade
- Speed Control Switch for Wall with long power line and easy for control
- Suitable for cooling-down temperature in dining room, shopping mall, workshop, warehouse and hall ect.



Introduction to Functions

Model No	Size mm	Voltage	Phase	Frequency Hz	Power W	Speed r/min	Air Volume m ³ /min	Noise dB(A)
SACSF-18 18"	450	220-240	1	50/60	130	1400/1600	140	65

Introduction to Package

Model No	NW KGS	GW KGS	Packing (1PC/CTN)			
			Meas(cm)	20GP	40GP	40HQ
SACSF-18 18"	10.0	11.0	67×26×52	310	620	730

All the pictures are for reference only, pls adhere to the actual product as the standard, the right of final explanation is owned by our SuperAsia.

Portable Propeller Ventilator (8" , 10" , 12" , 14" , 16" , 18")

- Novel outlook,excellent craftwork, novel style
- Supporter and handle flexible using, movable operation
- With different type base to change different direction for the output
- Utilizes CAD optimized design for Blade and Air Outlet, large air flow and high pressure
- Connecting a flexible soft duct, high pressure under long distance
- Suitable for underground, telecommunication, repairing tunnel project and so on.



Introduction to Functions

Model No	Size mm	Voltage	Frequency Hz	Power W	Speed r/min	Pressure Pa	Air Volume m ³ /min	Noise dB(A)
SAPPV-08;SAPPV-08/110	200	110/220	50/60	230	2800/3300	25	245	63
SAPPV-10;SAPPV-10/110	250	110/220	50/60	320	2800/3300	43	294	68
SAPPV-12;SAPPV-12/110	300	110/220	50/60	520	2800/3300	65	373	71
SAPPV-14;SAPPV-14/110	350	110/220	50/60	750	2800/3300	82	598	76
SAPPV-16;SAPPV-16/110	400	110/220	50/60	1800	2800/3300	96	700	80
SAPPV-18;SAPPV-18/110	450	110/220	50	1500	2800	162	972	83

Introduction to Package

Model No	NW KGS	GW KGS	Packing (1PC/CTN)			
			Meas(cm)	20GP	40GP	40HQ
SAPPV-08;SAPPV-08/110	7.0	7.5	33×26.5×35	900	1880	2210
SAPPV-10;SAPPV-10/110	8.3	8.8	38×30.5×35	680	1420	1660
SAPPV-12;SAPPV-12/110	10.5	11.5	42×35.5×43	430	860	1050
SAPPV-14;SAPPV-14/110	18.0	19.0	53×43×43	280	560	680
SAPPV-16;SAPPV-16/110	22.0	24.0	52×51×51	200	420	490
SAPPV-18;SAPPV-18/110	27.0	29.0	59×55×49.5	170	350	420

All the pictures are for reference only, pls adhere to the actual product as the standard, the right of final explanation is owned by our SuperAsia.

Movable Blower (20" , 24")

- Novel outlook,excellent craftwork, novel style
- Supporter with wheel, movable operation
- Angle-adjustable Blade, large air flow and high pressure
- Connecting a flexible soft duct, high pressure under long distance
- Suitable for underground, telecommunication, repairing tunnel project and so on.



Introduction to Functions

Model No	Size mm	Voltage	Frequency Hz	Power W	Speed r/min	Pressure Pa	Air Volume m ³ /min	Noise dB(A)
SAPPV-20 20"	500	220-240	50/60	1500	2800/3300	200	1050	88
SAPPVT-20 20"	500	380-415	50/60	1500	2800/3300	200	1050	88
SAPPV-24 24"	600	220-240	50/60	2000	1400/1600	290	1100	92
SAPPVT-24 24"	600	380-415	50/60	2000	1400/1600	290	1100	92

Introduction to Package

Model No	NW KGS	GW KGS	Packing (1PC/CTN)			
			Meas(cm)	20GP	40GP	40HQ
SAPPV-20 20"	32.0	35.0	70.5×66×52	100	200	260
SAPPVT-20 20"	32.0	35.0	70.5×66×52	100	200	260
SAPPV-24 24"	45.0	52.0	77×77×53	85	170	210
SAPPVT-24 24"	45.0	52.0	77×77×53	85	170	210

All the pictures are for reference only, pls adhere to the actual product as the standard, the right of final explanation is owned by our SuperAsia.

Flexible Ventilation 5M & 10M Duct (8" , 10" , 12" , 14" , 16" , 18" , 20" , 24")

- PVC water and fire resistant fabric
- Standard Length: 5 meters, 10 meters
- Temperature range: -20-80 °C
- With hanging metal rings every 1 meter
- Supported by helix steel wire and black rubber strip



Introduction to Package

Model No	NW KGS	GW KGS	Size mm	Packing (IPC/CTN)			
				Meas(cm)	20GP	40GP	40HQ
SAFD-08/5	2.4	2.6	5M	24×24×18	2700	5390	6350
SAFD-10/5	3.0	3.3	5M	29×29×16	2080	4150	4890
SAFD-12/5	4.0	4.3	5M	34×34×16	1520	3030	3570
SAFD-14/5	4.6	5.1	5M	39×39×16	1150	2300	2710
SAFD-16/5	5.3	5.8	5M	44×44×15	970	1940	2280
SAFD-18/5	6.5	7.2	5M	49×49×15	780	1560	1840
SAFD-20/5	7.6	8.5	5M	54×54×14	700	1400	1650
SAFD-24/5	9.6	11.0	5M	64×64×14	490	980	1150
SAFD-08/10	4.8	5.1	10M	24×24×28	1730	3460	4080
SAFD-10/10	5.9	6.3	10M	29×29×26	1280	2560	3020
SAFD-12/10	7.2	7.5	10M	34×34×26	940	1880	2200
SAFD-14/10	9.2	9.8	10M	39×39×26	710	1420	1650
SAFD-16/10	10.2	11.0	10M	44×44×25	580	1160	1370
SAFD-18/10	12.9	13.8	10M	49×49×25	470	940	1100
SAFD-20/10	14.8	15.9	10M	54×54×23	420	840	985
SAFD-24/10	19.3	20.80	10M	64×64×23	300	600	700

All the pictures are for reference only, pls adhere to the actual product as the standard, the right of final explanation is owned by our SuperAsia.

Propeller Exhaust Fan (With Shutter) - (8" , 10" , 12" , 14" , 16" , 18")

- Low noise rolling bearing, and it has a long service life
- Novel outlook, easy for install, spare electricity power
- Utilizes CAD optimized design for blade, stable air flow and high efficiency
- Design with shutter, better defend the fan from intrude of wind and rain
- Suitable for school, hotel, home for ventilation, exhaust, detoxicating and dedusting.



Introduction to Functions

Model No	Size mm	Voltage	Phase	Frequency Hz	Power W	Speed r/min	Air Volume m ³ /min	Noise dB(A)
SAPEF-08	200	220-240	1	50/60	20	1400/1600	10	46
SAPEF-10	250	220-240	1	50/60	30	1400/1600	15	50
SAPEF-12	300	220-240	1	50/60	45	1400/1600	21	55
SAPEF-14	350	220-240	1	50/60	100	1400/1600	45	60
SAPEF-16	400	220-240	1	50/60	150	1400/1600	56	68
SAPEF-18	450	220-240	1	50	320	1400	58	70

Introduction to Package

Model No	NW KGS	GW KGS	Packing (1PC/CTN)			
			Meas(cm)	20GP	40GP	40HQ
SAPEF-08 08"	4.0	4.3	31×22×31	1320	2640	3120
SAPEF-10 10"	5.0	5.6	36×23×36	865	1730	2040
SAPEF-12 12"	5.3	6.0	41×23×41	665	1330	1570
SAPEF-14 14"	7.5	8.5	45×25×45	555	1110	1305
SAPEF-16 16"	8.2	9.2	50×25×50	450	900	1055
SAPEF-18 18"	15.0	16.0	62×33×62	230	460	520

All the pictures are for reference only, pls adhere to the actual product as the standard, the right of final explanation is owned by our SuperAsia.

Heavy Duty Exhaust Fan (9" , 12" , 16" , 18" , 24" , 36")

- Strong shape, and it has a long service life
- Large air flow, low noise, spare electricity power, reverse for ventilation
- Utilizes CAD optimized design for blade, with high efficiency
- With front and back guard, suitable for special installation defend and requirement,
- Suitable for shool, hotel, home ect. for ventilation




Introduction to Functions

Model No	Size mm	Voltage	Phase	Frequency Hz	Power W	Speed r/min	Air Volume m ³ /min	Noise dB(A)
SAVF-09HD	250	220-240	1	50/60	50	1400/1600	15	50
SAVF-12HD	300	220-240	1	50/60	100	1400/1600	30	69
SAVF-16HD	400	220-240	1	50/60	230	1400/1600	48	74
SAVF-18HD	450	220-240	1	50/60	280	1400/1600	82	78
SAVF-24HD	600	220-240	1	50/60	700	1400/1600	196	80
SAVFT-24HD	600	380-415	1	50/60	700	1400/1600	196	80
SAVF-30HD	750	380-415	1	50/60	900	960/1100	270	85

Introduction to Package

Model No	NW KGS	GW KGS	Packing (1PC/CTN)			
			Meas(cm)	20GP	40GP	40HQ
SAVF-09HD	4.5	5.0	32×32×22	1250	2500	2950
SAVF-12HD	6.0	6.5	40×40×27	640	1280	1550
SAVF-16HD	8.0	8.5	50×50×28.5	390	780	950
SAVF-18HD	12.0	12.0	57×57×32	260	520	650
SAVF-24HD SAVFT-24HD	20.5	21.0	71×70×35.5	150	300	380
SAVF-30HD	35.0	37.0	92×92×44	75	150	170

Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
SAVF-09HD	297	235	250	9	195
SAVF-12HD	390	325	308	8.5	235
SAVF-16HD	483	417	367	8.5	255
SAVF-18HD	558	476	435	10.5	305
SAVF-24HD; SAVFT-24HD	700	623	585	12	370
SAVF-30HD	898	768	710	13	425

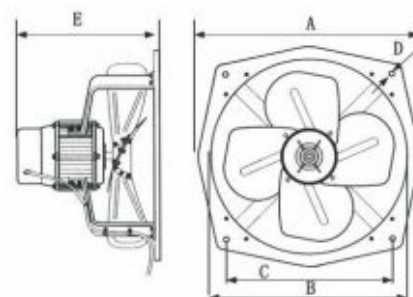

All the pictures are for reference only, pls adhere to the actual product as the standard, the right of final explanation is owned by our SuperAsia.

Mist Fan (26" , 30")

- Waterproof electrical design, safety for using;Three speeds, misting volume could be adjustable
- Centrifugal atomization design, without nozzle, no needfor water-filtration equipment
- Mist and air delivery drive by seperate motor. Convenient for repair
- Suitablefor open air-restaurants, Garden parties, livestock farm, greehouse and large outdoor place ect.



Introduction to Functions

Model No	Size mm	Voltage V	Phase	Frequency Hz	Power W	Speed r/min	Air Volume m ³ /min	Capacity L	Noise dB(A)
SAMSF-26; SAMWF-26	650	220-240	1	50/60	280	1400/1600	210	40/20	80
SAMSF-30; SAMWF-30	750	220-240	1	50/60	350	1400/1600	290	40/20	86

Introduction to Package

Model No	NW KGS	GW KGS	Packing (SKD/CKD)		
			20GP	40GP	40HQ
SAMSF-26	26.0	28.0	180	360	420
SAMSF-30	27.0	29.0	160	320	380
SAMWF-26	14.0	16.0	250	500	595
SAMWF-30	15.0	17.0	225	450	535

Mist Axial Fan (18")

- Waterproof electrical design, safety for using;Misting volume could be adjustable
- Centrifugal atomization design, without nozzle, no needfor water-filtration equipment
- Mist and air delivery driven by seperate motor.convenient for repair
- Suitablefor livestock farm, greehouse and large outdoor place ect.



Introduction to Functions



Model No	Size mm	Voltage V	Phase	FrequencyHz	Power W	Speed r/min	Air Volume m ³ /min	Capacity L	Noise dB(A)
SAMAF-18	450	220-240	1	50/60	400	1400/1600	350	20	68



Introduction to Package

Model No	NW KGS	GW KGS	Packing (1PC/CTN)			
			Meas(cm)	20GP	40GP	40HQ
SAMAF-18	43.0	45.0	68×74×89	60	125	145

All the pictures are for reference only, pls adhere to the actual product as the standard, the right of final explanation is owned by our SuperAsia.

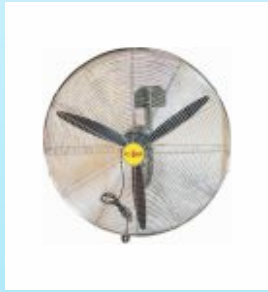

SUPER ASIA GROUP
PAKSITAN